


UP TO 50% HIGHER FLOW RATES



SUPERIOR PERFORMANCE

The Wilden® FIT metal pump sets the new standard for pump performance. This pump provides superior flow rates, is easy to maintain, and increases plant profitability beyond any other air-operated double-diaphragm (AODD) pump on the market.

NO REPIPING

The FIT pump is a direct replacement for Wilden pumps in the field and many competitors.

REDUCE DOWNTIME

The FIT has the fewest fasteners compared to other pumps and a single socket design to reduce downtime making it easy to assemble/disassemble.

Contact your authorized Wilden distributor today!

Features & Benefits:

- Ductile Iron available with the Pro-Flo® SHIFT and Pro-Flo® Air Distribution Systems
- Sizes available: 25 mm (1"), 38 mm (1-1/2"),
 51 mm (2"), and 76 mm (3")
- Also available in aluminum and stainless steel with Pro-Flo SHIFT and Pro-Flo Air Distribution Systems







Direct replacement for the following and does not require any repiping.

WILDEN FIT MODEL	DIRECTLY REPLACES
PS/P220	P2 PX/P200 - Threaded
PS/P230	PX/P200 - Flanged
PS/P420	PS/PX/P4
PS/P430	PS/PX/P400
PS/P820	PS/PX/P8 ARO PD20 Warren Rupp S20 Versa-Matic E2
PS/P830	PS/PX/P800
PS1520	PS/PX15 ARO PD30 Warren Rupp S30 Versa-Matic E3
PS1530	PS/PX1500

Wilden FIT in Ductile Iron is only available with the Pro-Flo® SHIFT and Pro-Flo® Air Distribution Systems. P230 not available in Ductile Iron. ARO® is a registered trademark of Ingersoll Rand® Versa-Matic® is a registered trademark of Warren Rupp®, Inc. SANDPIPER, a Warren Rupp, Inc. brand Warren Rupp®, Inc. is registered trademark of IDEX® Corporation






22069 Van Buren Street, Grand Terrace, CA 92313-5651 P: +1 (909) 422-1730 • F: +1 (909) 783-3440 wildenpump.com

The Best Performing AODD Pump in the World

With superior flow rates, the Wilden FIT metal pump can be used in place of some of the larger competitor AODD pumps. This can reduce initial purchase price, cost of primary wear parts and lower accumulating energy costs substantially.

Wilden 38 mm (1-1/2") FIT Outperforms the 38 mm (1-1/2") & 51 mm (2") SANDPIPER Over Majority of Curve

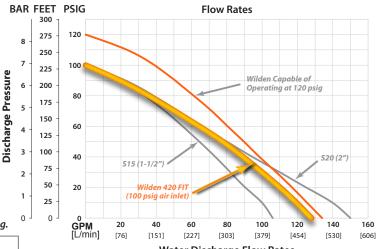

Water Discharge Flow Rates

Wilden PS420 FIT vs. SANDPIPER S15* & S20* *Values from published flow curve



Authorized PSG® Partners

airpumping.co.uk Unit 16, Upminster Trading Park, Warley St., Upminster, Essex, RM14 3PJ, ENGLAND

Copyright 2017 PSG®, a Dover company