

INTRODUCTION OF THE 13 MM (1/2") PRO-FLO X™ METAL NATURAL GAS POWERED PUMP

Wilden is pleased to announce the availability of the new 13 mm (1/2") Original™ Series gas powered Pro-Flo X™ metal pump. Designed for oil and gas industries, this new pump has been tested and certified by CSA International to be used in applications where compressed natural gas is the energy source and the driving force of the pump.


Included with this new product is the innovative Pro-Flo X™ air distribution system (ADS) with the Efficiency Management System (EMS). The patent pending EMST™ optimizes the new Pro-Flo X™ ADS to specific operating parameters. As with other Pro-Flo X™ models, the EMS allows the user to select an optimal balance between flow and efficiency.

The new PX1 natural gas powered pump is constructed of approved materials and includes a grounding cable. The new PX1 natural gas powered pump will include a blue serial number tag for easy identification in the field. The pump also includes a caution sticker that details specific safety information and CSA certification logos.

Features & Benefits:

- CSA Certified
- ATEX Approved models available
- Patent pending Pro-Flo X™ ADS
- Lube-free operation
- Statically dissipative elastomer options
- Includes grounding cable
- Wetted path options: aluminum and stainless steel
- Elastomer options: Buna-N, ESD Buna-N
- 13 mm (1/2") NPT liquid connections
- Max. flow rate is 62.8 lpm (16.6 gpm)
- Max. gas pressure is 6.9 bar (100 psig)
- Max. discharge pressure is 6.9 bar (100 psig)

PRO-FLO™ X
PROGRESSIVE PUMP TECHNOLOGY

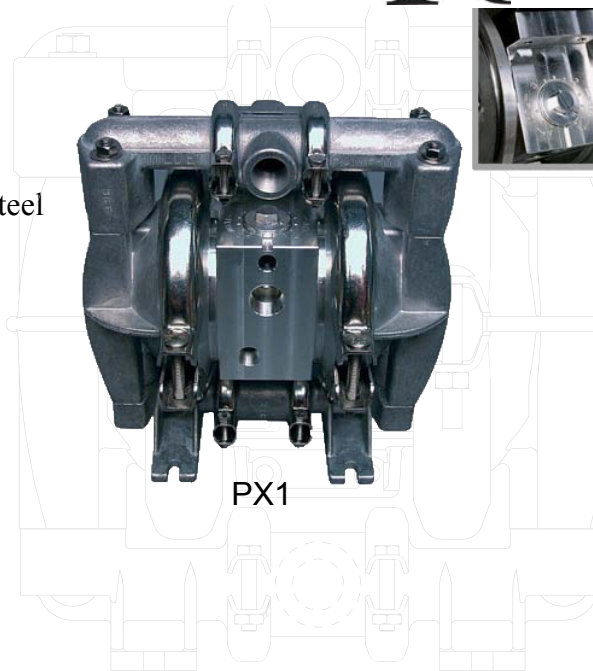

22069 Van Buren Street, Grand Terrace, CA 92313
Tel 909.422.173 • Fax 909.783.3440

www.wildenpump.com