

INTRODUCTION OF THE 13mm (1/2") & 25 mm (1") PRO-FLO X™ ORIGINAL™ & ADVANCED™ METAL UL 79 LISTED PUMP


Wilden is proud to announce the availability of the new 13mm (1/2") & 25 mm (1") Pro-Flo X™ metal **UL 79** Listed pumps. These pumps have been evaluated and listed by UL for compliance to UL 79, *Power-Operated Pumps for Petroleum Dispensing Products*.

Included with this new product is the innovative Pro-Flo X™ air distribution system (ADS) with the Efficiency Management System (EMS). The patent pending EMS™ optimizes the new Pro-Flo X™ ADS for specific application parameters. The EMS allows the user to select the ideal balance between flow and efficiency.

The new PX 1 & PX200 UL pumps are constructed of approved materials. The pump also includes a caution sticker that details specific safety information and displays the UL logo.

Features & Benefits

- UL Listed
- Patent pending Pro-Flo X™ ADS
- 13 mm (1/2") & 25 mm (1") NPT side liquid connections
- Optional 1" inlet, 3/4" discharge center port option for Turbo-Flo or Pro-Flo retrofits. (PX200 Only)
- Elastomer options: Buna-N and PTFE (PX1 Buna-N only)
- Max. inlet pressure is 3.4 bar (50 psig)
- Max. discharge pressure is 3.4 bar (50 psig)
- Single-point Exhaust
- Advanced™ Series (PX200 only)
 - Maximum containment
 - Increased flow path
 - Larger solids passage

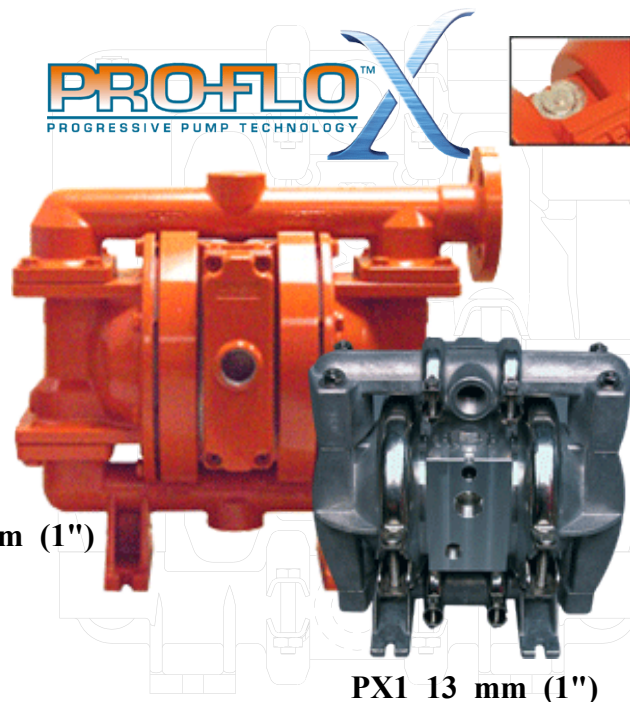

PX200 25 mm (1")

PX1 13 mm (1/2")

22069 Van Buren Street, Grand Terrace, CA 92313
Tel 909.422.1730 • Fax 909.783.3440