


INTRODUCTION OF THE 25 mm (1") PRO-FLO X™ HYGIENIC SERIES™ PUMP

Wilden is pleased to announce the new 25 mm (1") PX2 Hygienic Series™ (HS) stainless steel pump. The PX2 Hygienic Series™ pump was designed specifically to handle the most demanding sanitary and hygienic applications. This Hygienic Series pump has been certified to 3A standard 44-03 and EHEDG doc. 2 and doc. 8. The PX2 HS pumps can be configured to be clean in place (CIP) capable.

Wilden's new PX2 Hygienic Series™ pump comes equipped with the patent-pending Pro-Flo X™ air distribution system (ADS) including the Efficiency Management System™ (EMS) that allows the user to control flow rate as well as efficiency with the simple turn of a dial. The Pro-Flo X™ ADS provides reliable operation, high flow rates, with superior efficiency and anti-freezing characteristics.

Features & Benefits:

- Pro-Flo X™ ADS with patent pending EMS™
- 316L stainless steel wetted material
- All product contact surfaces have a max. Ra 0.8 µm (32 µ-in)
- Nickel-plated ADS
- 25 mm (1") Tri-clamp™ style, SMS 1145 and DIN 32676 (ISO 2852) connections
- Patented off-set check valve simplifies assembly
- When properly equipped, meets requirements of: USP Class VI, CFR21.177, EHEDG certified to doc. 2 & doc. 8, and 3A certified to standard 44-03
- CE Mark
- ATEX certified models available
- Liquid chamber designed for superior delicate product handling, drainability, and diaphragm life.
- CIP Capable

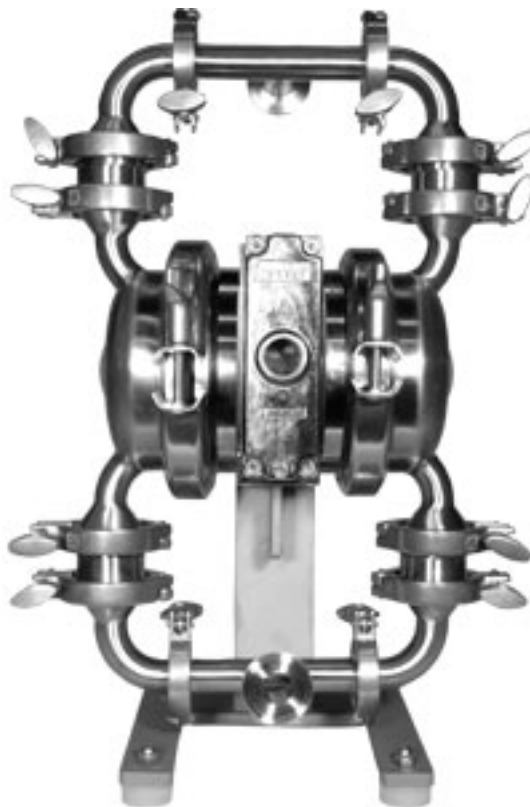

22069 Van Buren Street, Grand Terrace, CA 92313
Tel 909.422.1730 • Fax 909.783.3440

www.wildenpump.com

airpumping.co.uk

est. 1979

Unit 16, Uppminster Trading Park, Warley St, Uppminster, Essex, RM14 3PJ, ENGLAND