

GPS1520/GPS1530 CSA-CERTIFIED METAL PUMP

76 mm (3") Pump
Maximum Flow Rate:
933 lpm (246 gpm)


DIMENSIONAL DRAWING

PUMP DATA

Specifications:

Ship Weight.. 1520 Threaded AL 69 kg (152 lb)
1520 Threaded SS 126 kg (278 lb)
1530 Flanged 136 kg (300 lb)
Air Inlet 19 mm (3/4")
Inlet..... 76 mm (3")
Outlet..... 76 mm (3")

GPS1530 Stainless Steel

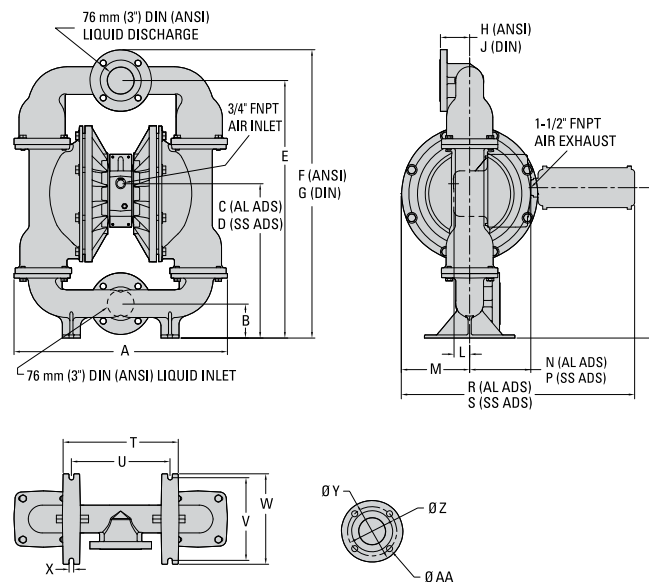

DIMENSIONS

ITEM	METRIC (mm)	STANDARD (inch)
A	659	26.0
B	105	4.1
C	477	18.8
D	483	19.0
E	796	31.3
F	890	35.1
G	891	35.3
H	90	3.6
J	88	3.5
K	465	18.3
L	48	1.9
M	211	8.3
N	189	7.4
P	177	7.0
R	721	28.4
S	709	27.9
T	356	14.0
U	305	12.0
V	256	10.1
W	279	11.0
X	14	0.6
	DIN (mm)	ANSI (inch)
Y	200 DIA.	7.5 DIA.
Z	160 DIA.	6.0 DIA.
AA	18 DIA.	0.8 DIA.

LW0260 REV. A

WILDEN®

22069 Van Buren Street
Grand Terrace, CA 92313-5651 USA

O: +1 (909) 422-1730 F: +1 (909) 783-3440
www.wildenpump.com

airpumping.co.uk
01708 259870




PSG
a DOVER company
psgdover.com

GPS1520/GPS1530 CSA-CERTIFIED METAL PUMP

PERFORMANCE

GPS1520/GPS1530 METAL EZ-INSTALL TPE-FITTED

Max. Flow Rate.....884 lpm (234 gpm)
Max. Inlet Pressure6.9 bar (100 psig)
Max. Size Solids..... 12.7 mm (1/2")
Suction Lift4.7 m Dry (15.3')
9.0 m Wet (29.5')

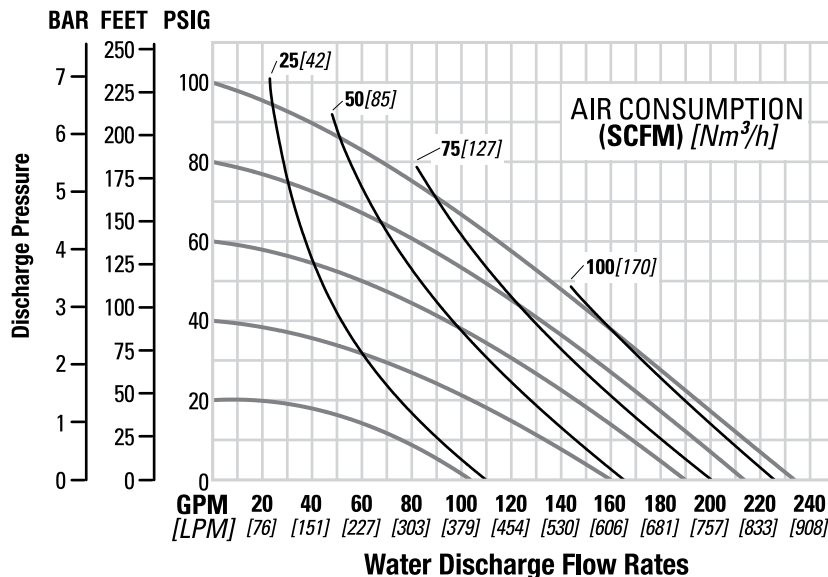

GPS1520/GPS1530 METAL FULL-STROKE PTFE-FITTED

Max. Flow Rate.....993 lpm (246 gpm)
Max. Inlet Pressure6.9 bar (100 psig)
Max. Size Solids..... 12.7 mm (1/2")
Max. Suction Lift5.9 m Dry (19.3')
8.6 m Wet (28.4')

