

GPS420/GPS430 CSA-CERTIFIED METAL PUMP

38 mm (1-1/2") Pump
Maximum Flow Rate:
460 lpm (122 gpm)

DIMENSIONAL DRAWING

PUMP DATA

Specifications:

Ship Weight.... 420 Threaded AL 26 kg (57 lb)
 430 Flanged AL 28 kg (62 lb)
 430 Flanged SS 53 kg (116 lb)
 430 Flanged SS 53 kg (116 lb)
Air Inlet 19 mm (3/4")
Inlet.....38 mm (1-1/2")
Outlet.....38 mm (1-1/2")

WILDEN®

22069 Van Buren Street
Grand Terrace, CA 92313-5651 USA
O: +1 (909) 422-1730 F: +1 (909) 783-3440
www.wildenpump.com

airpumping.co.uk
01708 259870




PSG
a DOVER company
psgdover.com

GPS420/GPS430 CSA-CERTIFIED METAL PUMP

PERFORMANCE

GPS420/GPS430 METAL EZ-INSTALL TPE-FITTED

Max. Flow Rate.....441 lpm (117 gpm)
Max. Inlet Pressure6.9 bar (100 psig)
Max. Size Solids.....6.4 mm (1/4")
Max. Suction Lift.....4.7 m Dry (15.3')
9.0 m Wet (29.5')

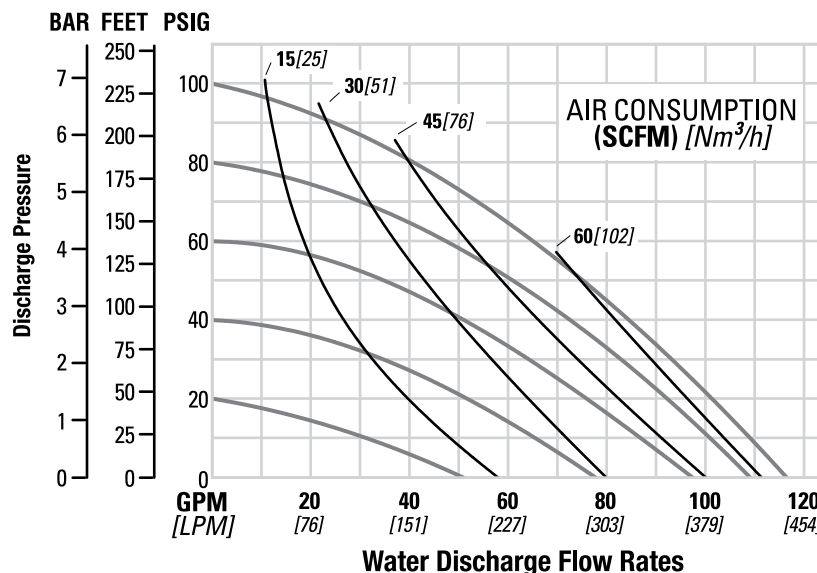

GPS420/GPS430 METAL FULL-STROKE PTFE-FITTED

Max. Flow Rate.....460 lpm (122 gpm)
Max. Inlet Pressure6.9 bar (100 psig)
Max. Solids Passage.....6.4 mm (1/4")
Max. Suction Lift.....4.5 m Dry (14.8')
8.6 m Wet (28.4')

