

# SHIFTING LARGE-SOLIDS HANDLING TO A WHOLE NEW LEVEL.

Introducing the world's most energy-efficient large-solids handling pump in its class. Period.

The all new...

**PRO-FLO®**  
**SHIFT**



PROGRESSIVE PUMP TECHNOLOGY

- Best-in-class energy-efficient Air Distribution System (ADS)
- Up to **60% savings** in air consumption over competitive AODD pump technologies means greater yield per SCFM used
- Ease of maintenance with fewest ADS parts in the industry
- Rugged design excels in transferring slurries with large solids in the toughest environments
- Submersible with no electronic parts

See the proof at

**[profloshift.com/proof](http://profloshift.com/proof)**

**Simple. Reliable. Efficient. And now,  
ready for large solids and slurries.**

The Wilden Pro-Flo® SHIFT Air Distribution System (ADS) offers sustainable value by providing the most efficient pump in its class. The patent-pending Pro-Flo SHIFT Air Control Spool automatically adjusts to varying system parameters to reduce energy consumption by eliminating over-filling of the air chamber. Best of all, Pro-Flo SHIFT is easy to use... just ***"Plug, Pump, and Save."***


# WILDEN®





Designed to easily handle slurries with large solids in the toughest applications, the revolutionary Pro-Flo SHIFT offers unmatched efficiency and the fastest return on investment. The Wilden Pro-Flo SHIFT optimizes AODD pump efficiency while maximizing product yield by addressing a number of crucial areas of performance, including:

| Pro-Flo SHIFT Model | Inlet/Discharge | Max Discharge Pressure | Max Solids Size | Max Suction Lift                       | Max Flow          |
|---------------------|-----------------|------------------------|-----------------|----------------------------------------|-------------------|
| PS810 Brahma        | 51 mm (2")      | 8.6 bar (125 psig)     | 51 mm (2")      | 7.4 m (24.3') Dry<br>9.0 m (29.5') Wet | 640 lpm (169 gpm) |
| PS1510 Brahma       | 76 mm (3")      | 8.6 bar (125 psig)     | 76 mm (3")      | 7.1 m (23.3') Dry<br>9.0 m (29.5') Wet | 882 lpm (233 gpm) |

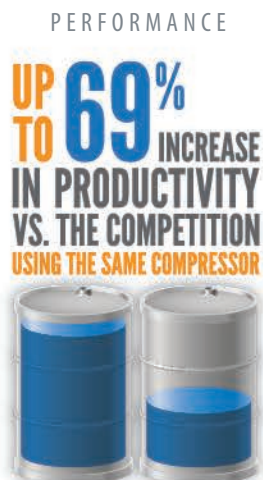

See the proof at  
[profloshift.com/proof](http://profloshift.com/proof)

**WILDEN®**

PSG  
22069 Van Buren Street, Grand Terrace, CA 92313-5651  
Telephone 909-422-1730 • Fax 909-783-3440  
[wildenpump.com](http://wildenpump.com)



Authorized PSG® Partner:

**airpumping.co.uk**

*est. 1979*  
Unit 16, Upminster Trading Park, Warley St, Upminster, Essex, RM14 3PJ, ENGLAND