

PROTECT YOUR INVESTMENT, REFINE YOUR PROCESS

The Wilden line of SD surge dampeners effectively suppresses pulsation associated with reciprocating pumps, prolonging equipment life and maximizing Mean Time Between Repair (MTBR). The SD dampener self-adjusts to fluctuating inlet pressures making the installation flexible, versatile, and user friendly for a variety of processes. These dampeners are engineered for demanding solids-handling applications commonly found where reciprocating pumps excel.

- An efficient tool to reduce water-hammer and protect equipment
- Uses many existing Wilden parts for minimum spare parts inventory
- Effectively dampens up to 70% of discharge pressure fluctuations



WILDEN®
A DOVER COMPANY

WILDEN DAMPENERS

REFINE YOUR PROCESS:

- Minimize pressure fluctuation
- Prevent water hammer and associated damage
- Self-adjusting to varying system pressures
- Minimize spare parts inventory
- Large solids capacity
- Can be configured to meet ATEX II 2 GD X requirements

WETTED MATERIALS

- Aluminum
- Stainless Steel
- Ductile Iron
- Polypropylene
- PVDF

REFINE YOUR PROCESS:

- Minimize pressure fluctuation
- Prevent water hammer and associated damage
- Self-adjusting to varying system pressures
- Minimize spare parts inventory
- FDA CFR 21.177
- USP Class VI
- ATEX II 2 GD X
- EHEDG certified to doc. 2 & doc. 8 when properly configured and installed
- CIP capable
- Large solids capacity
- Liquid chamber designed for superior delicate product handling, drainability and diaphragm life
- Surface finish of Ra 0.8 µm (32 µ-in) or better for optimum clean-ability

WETTED MATERIALS

- 316L stainless steel wetted material

THE EQUALIZER

WILDEN AUTOMATIC SURGE DAMPENER



CONNECTIONS

- Threaded NPT and BSPT: 13mm (1/2"), 25mm (1"), 51mm (2"), and 76mm (3")
- Flanged ANSI and DIN connections: 51 mm (2") Advanced™


NON-WETTED MATERIALS

- Aluminum
- Nickel-plated Aluminum
- Stainless Steel
- Polypropylene
- Glass-filled Polypropylene



SANIFLO™

DAMPENERS

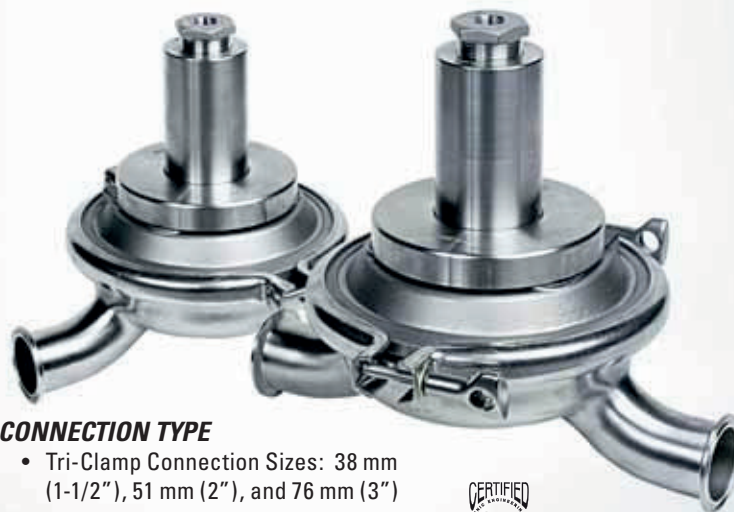

CONNECTION TYPE

- Tri-Clamp Connection Sizes: 38 mm (1-1/2"), 51 mm (2"), and 76 mm (3")

NON-WETTED MATERIALS

- Aluminum
- Nickel-plated Aluminum
- Stainless Steel



22069 Van Buren Street, Grand Terrace, CA 92313-5607
Telephone 909-422-1730 • Fax 909-783-3440
wilden@wildenpump.com



Your Distributor:

airpumping.co.uk
est. 1979 → 01708 259870